

# PS Series

## Type 1,2 (Direct connection)




### Specifications

- Frequency (Hz) : 50/60
- Protection Mode : L-N / N-PE
- Degree of protection : IP 20
- Diagnostics : Green Flag (Protected) / Red Flag (Replace)
- Connection & Mounting Method : Parallel Connection Type / Wall Mounting
- Internal Disconnecter : Thermal Runaway Multi-Fusing Protection
- Size of connecting wir : 4 ~ 6 mm<sup>2</sup> (or # 11 ~ 9AWG)
- **Optional Functions** : **Remote Contact**

Model No.	PS2-40S3P-DM	PS2-40S3P-DP	PS2-40S3P/40G-DM	PS2-40S3P/40G-DP
Nominal Voltage Rating	Tri-Phase 110~440V 3W+GND			
MCOV (Vac)	320			
$I_n$ (kA) -8/20 $\mu$ S- / $I_{max}$ (kA) -8/20 $\mu$ S-	20 / 40			
VPR (Vpk) (kV)	1.5			
SCCR (kA)	200			

### Dimensions

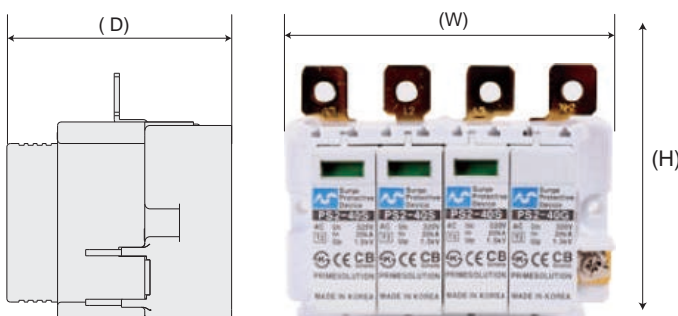


	Size(inch/mm)
W	3.9 / 99
H	2.9 / 74
D	2.5 / 64

● Circuit Diagram

Model No.


PS2-40S3P-DM

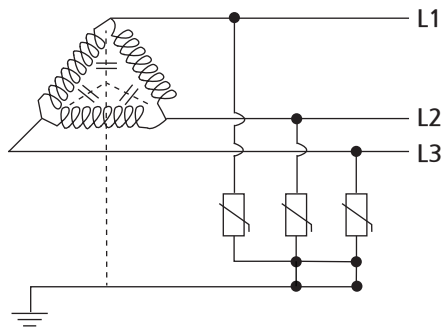

Tri-Phase 110~440V 3W+GND

Model No.

PS2-40S3P/40G-DM

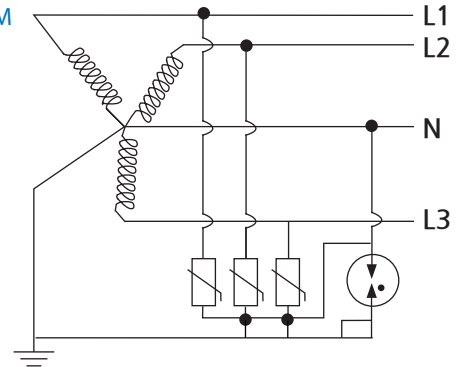

Tri-Phase 110~440V 3W+GND

*memo*



HEAD OFFICE

3960 West Point Loma Blvd. Ste. H San Diego, CA 92110

John Park Director / Technical Support Dept.

Office : +1,858,282,0901 (Ext,701)

Mobile : +1,858,322,3932

johnpark@primepowersolutions.com

www.PrimePowerSolutions.com

